

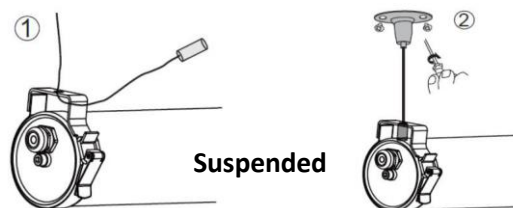


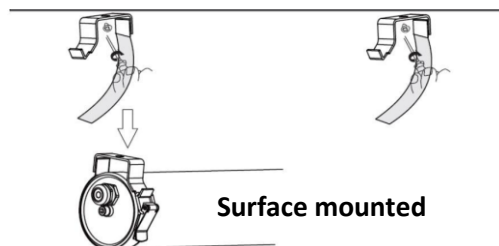

	20 Watt	40 Watt	60 Watt
Measurements:	600mm, Ø 80mm (H=100mm)	1200mm, Ø 80mm (H=100mm)	1500mm, Ø 80mm (H=100mm)
Mounting:	Surface mounted/Suspended (with optional suspension set)	Surface mounted/Suspended (with optional suspension set)	Surface mounted/Suspended (with optional suspension set)
Colour temperature:	2800-3500K Warm White 4000-4500K Natural White 6000-6500K Pure White	2800-3500K Warm White 4000-4500K Natural White 6000-6500K Pure White	2800-3500K Warm White 4000-4500K Natural White 6000-6500K Pure White
Lumen output:	>125lm/W (2500-2700lm)	>125lm/W (5000-5300lm)	>125lm/W (7500-7800lm)
Power consumption:	20W	40W	60W
LED chip:	Epistar SMD 2835 (168 pcs)	Epistar SMD 2835 (336 pcs)	Epistar SMD 2835 (432 pcs)
Driver:	TUV approved	TUV approved	TUV approved
Powerfactor:	>0.95	>0.95	>0.95
Dimmable:	On request	On request	On request
Sensor:	On request	On request	On request
Emergency:	On request	On request	On request
Color rendering CRI:	>80	>80	>80
Beam angle:	120°	120°	120°
Material:	Transparent/Frosted White/Silver end cap PC + aluminium	Transparent/Frosted White/Silver end cap PC + aluminium	Transparent/Frosted White/Silver end cap PC + aluminium
Working temperature:	-20°C - +40°C	-20°C - +40°C	-20°C - +40°C
Power:	AC100-240V	AC100-240V	AC100-240V
IP Class:	IP67 (IK10)	IP67 (IK10)	IP67 (IK10)
Lifespan:	ca. 40.000 hrs (40°C ambient temperature)	ca. 40.000 hrs (40°C ambient temperature)	ca. 40.000 hrs (40°C ambient temperature)
Warranty:	3 years	3 years	3 years

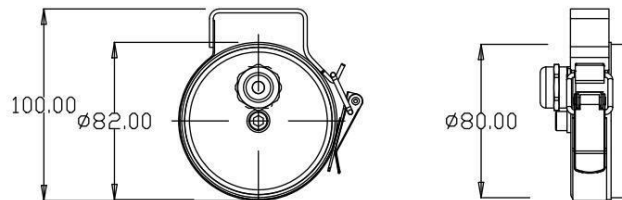

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 **F** +31 (0) 596 626760 **E** info@doublelux.com **W** www.doublelux.com