




	480 Watt (4x120W)	720 Watt (6x120W)	960 Watt (6x160W)
Measurements:	740x550x80mm	740x600x80mm	740x600x80mm
Mounting:	Bracket	Bracket	Bracket
LED chip:	Cree High-power Leds	Cree High-power Leds	Cree High-power Leds
Driver:	Meanwell	Meanwell	Meanwell
Beam angle:	30°, 60°	30°, 60°	30°, 60°
Power Factor:	> 0.96	> 0.96	> 0.96
Colour rendering (Ra):	≥ 70	≥ 70	≥ 70
Lumen output:	ca. 50.410lm (3000K) ca. 56.640lm (4000K) ca. 56.640lm (5700K)	ca. 75.620lm (3000K) ca. 84.960lm (4000K) ca. 84.960lm (5700K)	ca. 98.260lm (3000K) ca. 110.400lm (4000K) ca. 110.400lm (5700K)
Lm/W	ca. 105lm/W (3000K) ca. 118 lm/W (4000K) ca. 118lm/W (5700K)	ca. 105lm/W (3000K) ca. 118 lm/W (4000K) ca. 118lm/W (5700K)	ca. 102lm/W (3000K) ca. 115 lm/W (4000K) ca. 115lm/W (5700K)
Colour temperature:	3000/4000/5700K	3000/4000/5700K	3000/4000/5700K
Housing:	Body aluminium	Die cast aluminium	Die cast aluminium
Color:	Black	Black	Black
Working range:	-30°C-+50°C	-30°C-+50°C	-30°C-+50°C
Input voltage:	AC 220-240V 50-60Hz	AC 220-240V 50-60Hz	AC 220-240V 50-60Hz
Lifespan:	80.800 hours L90 B10 169.000 hours L80 B10 181.000 hours L70 B10	80.800 hours L90 B10 169.000 hours L80 B10 181.000 hours L70 B10	80.800 hours L90 B10 169.000 hours L80 B10 181.000 hours L70 B10
Warranty:	3 years	3 years	3 years
Protection class:	IP65 - IK10	IP65 - IK10	IP65 - IK10
Weight:	18,4 kilo	23,9 kilo	23,9 kilo
Certification:	CE- RoHS	CE- RoHS	CE- RoHS

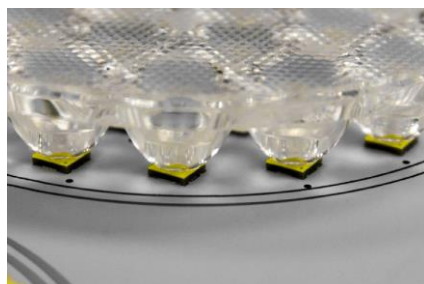

Produced in the Netherlands

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 **F** +31 (0) 596 626760 **E** info@doublelux.com **W** www.doublelux.com