




	90 Watt	100 Watt	110 Watt	120 Watt
Measurements:	665x332x176mm	665x332x176mm	665x332x176mm	665x332x176mm
Mounting:	Pole 40-76mm	Pole 40-76mm	Pole 40-76mm	Pole 40-76mm
LED chip:	Cree	Cree	Cree	Cree
Driver:	Philips	Philips	Philips	Philips
Beam angle:	Batwing	Batwing	Batwing	Batwing
Power Factor:	> 0.95	> 0.95	> 0.95	> 0.95
Colour rendering (Ra):	≥ 70	≥ 70	≥ 70	≥ 70
Lumen output (chip):	ca. 9000-9900lm	ca. 10.000-11.000lm	ca. 11.000-12.100lm	ca. 12.000-13.200lm
Lm/W	ca 100-110lm/W	ca 100-110lm/W	ca 100-110lm/W	ca 100-110lm/W
Colour temperature:	3000/4000/5000K	3000/4000/5000K	3000/4000/5000K	3000/4000/5000K
Housing:	Die cast aluminium Borosilicate glass Stainless steel fitting	Die cast aluminium Borosilicate glass Stainless steel fitting	Die cast aluminium Borosilicate glass Stainless steel fitting	Die cast aluminium Borosilicate glass Stainless steel fitting
Lens	UV protection PC	UV protection PC	UV protection PC	UV protection PC
Working range:	-35°C+50°C	-35°C+50°C	-35°C+50°C	-35°C+50°C
Input voltage:	AC 100-240V 47-63Hz	AC 100-240V 47-63Hz	AC 100-240V 47-63Hz	AC 100-240V 47-63Hz
Lifespan:	50.000 hours	50.000 hours	50.000 hours	50.000 hours
Warranty:	3 years	3 years	3 years	3 years
Protection class:	IP66	IP66	IP66	IP66
Certification:	CE- RoHS	CE- RoHS	CE- RoHS	CE- RoHS

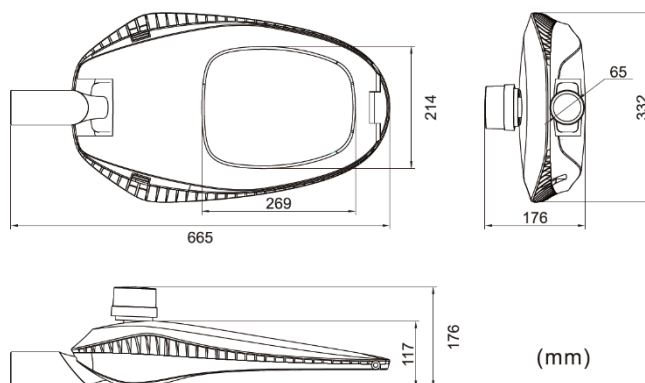

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 **F** +31 (0) 596 626760 **E** info@doublelux.com **W** www.doublelux.com