





200 Watt - ATEX Zone 1, 2, 21, 22

Measurements:	475x291x342mm (with bracket)
Mounting:	Suspended (with bracket)
LED chip:	SMD sanan 3030
Driver:	Sosen
Beam angle:	120°
Colour rendering (Ra):	≥ 74
Lumen output:	ca. 22400lm
Lm/W:	ca. 112 lm/W
Colour temperature:	4000/5000/6000K
Housing:	Aluminium/Stainless steel bracket, Diffuser Tempered glass Food version
Cable and block:	Cable length 3 meter/Cable gland M25/Terminal Block 3x2.5mm
Supply wire:	Suitable temperature 80°C
Weight:	ca. 15.8 kg
Working range:	-40°C - +55°C
Input voltage:	90-305V 50/60Hz
Lifespan:	50.000 hours L70 B10
Warranty:	3 years
Protection class:	IP66 (1)
Ex mark for Gas:	Ex II 2 G Ex dmb II T5 Gb
Ex mark for Dust:	Ex II 2 D Ex tb IIIC T90°C Db IP66
Certification:	ATEX-2014/34/EU EN 60079-0:2012+A11:2013, EN 60079-1:2014 EN 60079-18:2015+A1:2017, EN 60079-31:2014

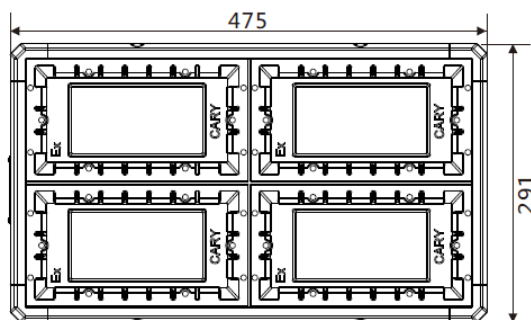

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 F +31 (0) 596 626760 E info@doublelux.com W www.doublelux.com