




	30 Watt	30 Watt
Measurements:	595x595x11mm	1195x295x11mm
Mounting:	Recessed/Surface mounted/Suspended	Recessed/Surface mounted/Suspended
LED chip:	Epistar	Epistar
Driver:	AGT FlashFree	AGT FlashFree
Beam angle:	120°	120°
Powerfactor:	>0.95	>0.95
Colour rendering (Ra):	≥ 80	≥ 80
Lumen output:	ca. 3300lm	ca. 3300lm
Unified Glare Rating:	UGR <19	UGR <19
Colour temperature:	3000/4000/6000K	3000/4000/6000K
MacAdams step:	4	4
Housing:	Aluminum; White RAL 9016 + Prisma cover	Aluminum; White RAL 9016 + Prisma cover
Input voltage:	100-240V AC	100-240V AC
Dimmable:	On request: DALI / 1-10V / TRIAC	On request: DALI / 1-10V / TRIAC
Lifespan:	ca 50.000 hours (L80 B10 36.000h)	ca 50.000 hours (L80 B10 36.000h)
Warranty:	3 years	3 years
Protection class:	IP20	IP20
Certification:	CE- RoHS - TÜV	CE- RoHS - TÜV

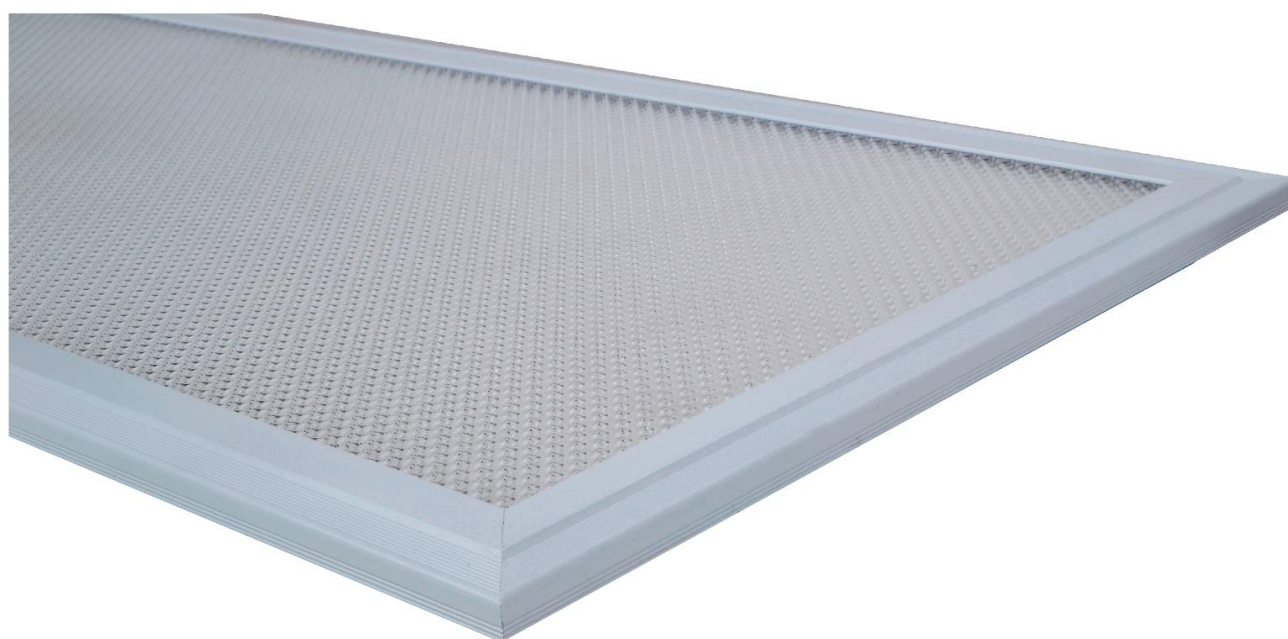

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 F +31 (0) 596 626760 E info@doublelux.com W www.doublelux.com