
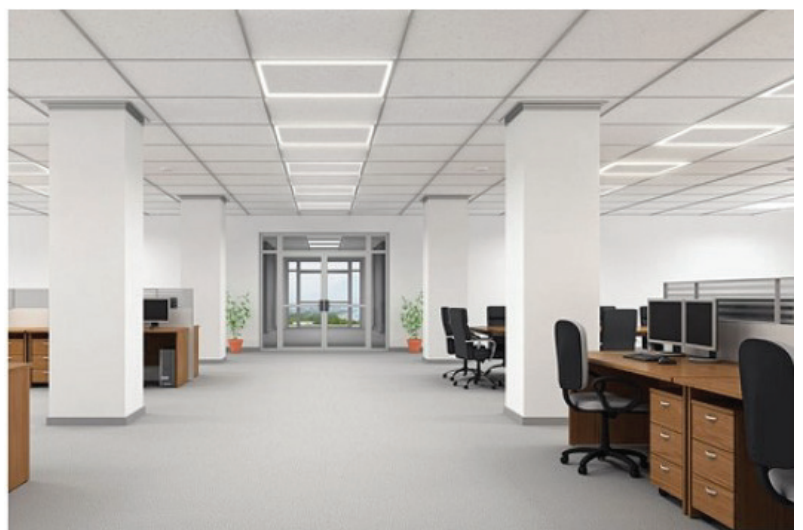


Connected Load:	Lumen output:	Luminous efficacy:	Measurements:	Weight:
36 Watt	3600lm	100lm/W	590x590x16mm	0.7 kg

Mounting:	recessed
Color temperature:	3000/4000/6000 Kelvin
Color Rendering Index:	>80
Powerfaktor:	0.95
Beam angle:	120°
LED chip:	2835 SMD LED
Driver:	Flicker Free
Dimmable:	no
Mains voltage:	200-240 VAC
Mains frequency:	50-60Hz
Material:	frame aluminum, cover PC
Luminaire color:	white
IP class:	IP41
Lifespan:	50.000 hours L80/B50 (T _q 25°)
Warranty:	3 years

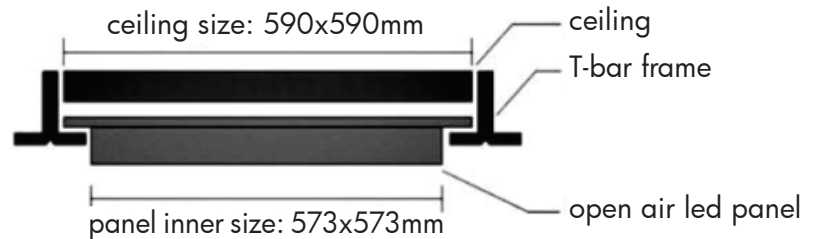

www.doublelux.nl

Double Lux Lighting B.V. Nijverheidsweg 2 9902 AE Appingedam The Netherlands T +31 (0)596 620075 E info@doublelux.nl

All technical data have been compiled with all due care, errors excepted.
 Product illustrations serve as examples and may differ from the original. We reserve the right to make alterations in our products.