




Connected Load:	Lumen output:	Luminous efficacy:	Measurements:	Weight:
40 Watt	6000lm	150lm/W	1425x70x80mm	4,4 kg
75 Watt	11.250lm	150lm/W	1425x70x80mm	4,4 kg

Mounting:	suspended/surface mounted (with optional bracket)
Color temperature:	3000/4000/5000 Kelvin (others on request)
Color Rendering Index:	>80 (CRI 90 on request)
Powerfaktor:	0.95
Beam angle:	30°/60°/90° (optic) -120° (opal) - asymmetric/double asymmetric
LED chip:	Samsung LM561C
Driver:	Tridonic
Dimmable:	on request: 1-10V/Dali
Mains voltage:	220-240V
Mains frequency:	50-60Hz
Ambient temperature:	-20° - +40°C
Material:	aluminum
Luminaire color:	white RAL 9016
IP class:	IP50
Impact resistance:	IK04 (ballproof on request)
Lifespan:	NL/EIA 2022 51.000 hours L90/B10, 135.000 hours L70/B10 (T _q 25°)
Warranty:	5 years

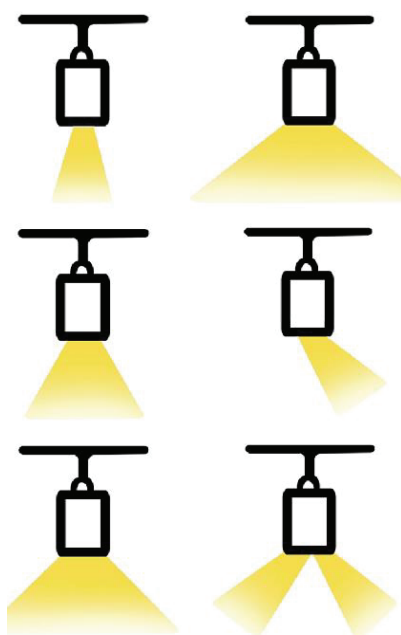

produced in the Netherlands




End feed



Blanking cover



End cap

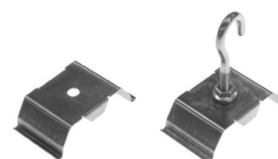

Brackets (1 per unit)

www.doublelux.nl

Double Lux Lighting B.V. Nijverheidsweg 2 9902 AE Appingedam The Netherlands T +31 (0)596 620075 E info@doublelux.nl

All technical data have been compiled with all due care, errors excepted.
 Product illustrations serve as examples and may differ from the original. We reserve the right to make alterations in our products.