




	1100 Lumen	2000 Lumen	3000 Lumen	4500 Lumen	6000 Lumen
Measurements:	Ø 410mm H 473mm	Ø 410mm H 473mm	Ø 410mm H 473mm	Ø 410mm H 473mm	Ø 410mm H 473mm
Mounting:	Suspended	Suspended	Suspended	Suspended	Suspended
Colour temperature:	2200/2700/3000 4000K/5700K	2200/2700/3000 4000K/5700K	2200/2700/3000 4000K/5700K	2200/2700/3000 4000K/5700K	2200/2700/3000 4000K/5700K
Lumen output:	ca. 1100lm	ca. 2000lm	ca. 3000lm	ca. 4500lm	ca. 6000lm
Power consumption:	6W 827/830/840 8W 927/930	12W 827/830/840 15W 927/930	18W 827/830/840 22W 927/930	27W 827/830/840 33W 927/930	37W 827/830/840
LED chip:	Philips Fortimo	Philips Fortimo	Philips Fortimo	Philips Fortimo	Philips Fortimo
Driver:	Philips Xitanium	Philips Xitanium	Philips Xitanium	Philips Xitanium	Philips Xitanium
Powerfactor:	0.9	0.9	0.9	0.9	0.9
Dimmable:	On request: Dali Triac/1-10V Casambi	On request: Dali Triac/1-10V Casambi	On request: Dali Triac/1-10V Casambi	On request: Dali Triac/1-10V Casambi	On request: Dali Triac/1-10V Casambi
Color rendering CRI:	>80/>90	>80/>90	>80/>90	>80/>90	>80/>90
Beam angle:	15/24/40/60°	15/24/40/60°	15/24/40/60°	15/24/40/60°	15/24/40/60°
Material:	aluminium polycarbonate	aluminium polycarbonate	aluminium polycarbonate	aluminium polycarbonate	aluminium polycarbonate
Color:	black/white/grey	black/white/grey	black/white/grey	black/white/grey	black/white/grey
MacAdam Steps:	3	3	3	3	3
Weight:	ca. 3,5 kg	ca. 3,5 kg	ca. 3,5 kg	ca. 3,5 kg	ca. 3,5 kg
IP Class:	IP20	IP20	IP20	IP20	IP20
Lifespan (L80 B10):	50.000 hrs	50.000 hrs	50.000 hrs	50.000 hrs	50.000 hrs
Warranty:	3 years	3 years	3 years	3 years	3 years

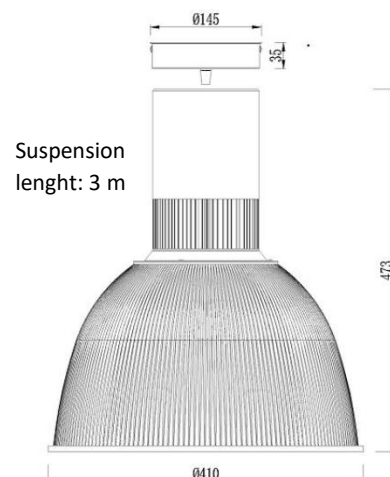

DOUBLE LUX LIGHTING B.V.

Nijverheidsweg 2, 9902 AE Appingedam, Nederland

T +31 (0) 596 620075 F +31 (0) 596 626760 E info@doublelux.com W www.doublelux.com